



Plate Roof

An ageless roof profile



Highly Characteristic Appearance

Improved Corrosion Protection



Plate Roof

An ageless roof profile

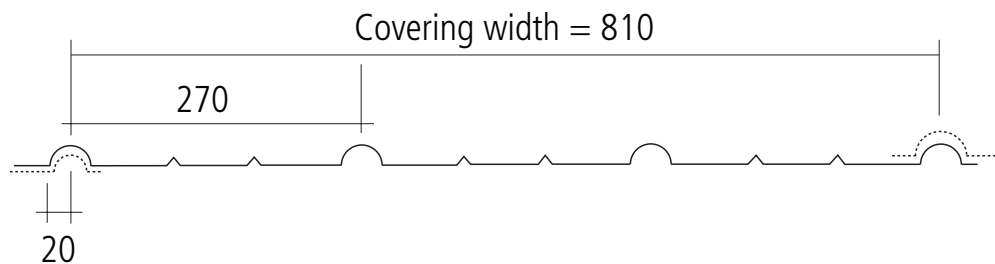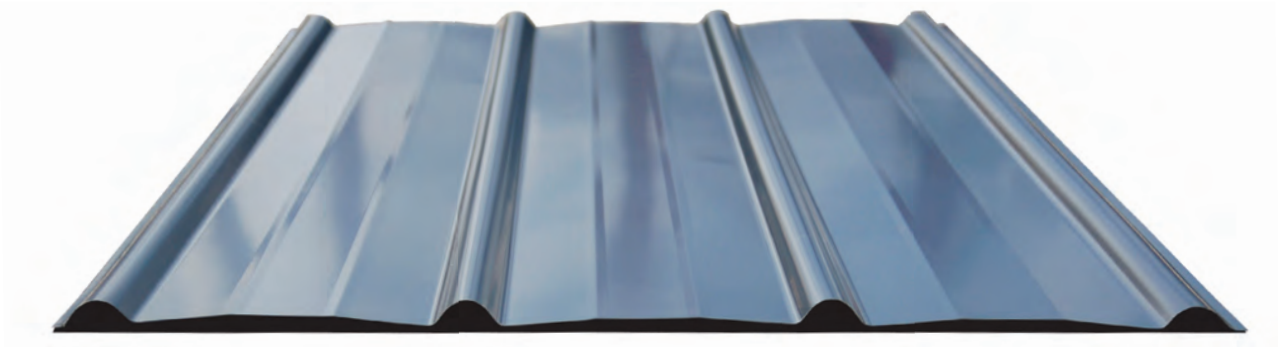

Available Colours



Black
RAL 9005



Graphite Grey
RAL 7024



Brick Red
RAL 8004



Wine Red
RAL 3009



Verdigris Green
RAL 6021



Silver
RAL 9006



Aluzinc
AZ 185



Galvanized
Z 275

Installation Instructions

- Recommended distance of ribs approximately 600 mm. Use beams of 25 x 95 or 45 x 95 mm.
- Plate Roof can be fastened with screws (4,8/50) and nails (60/3,7) with neoprene washers.
- Plate Roof should be fastened in the profile peak approximately 1200 mm between the lines (for both nails and screws).
- Plate Roof can be used at slopes of 7 degree. Use a sealing-strip 3x10 mm in the lateral joint for slopes below 14 degree.
- Along the plate side a connecting overlap of at least 300 mm with use of a small amount of sealing-fat is recommended.
- A sealing profile should be used, between roofridge and roof, when the slope is below 30 degrees.
- If you have to cut or subtract the sheet, only nibbler is recommended to use.

Please contact your local sales representative for more info.

Areco Sweden AB
Vinkelgatan 13
211 24 Malmö, Sweden

© 2009 Areco. All rights reserved. ARE 02052-02 01/2009 For more information visit us at www.areco.se

areco[®]